

C.CRANE

1001 Main Street Fortuna, CA 95540-2008 707-725-9000 Fax:707-725-9060

Website: ccrane.com Email: customerservice@ccrane.com

How to Replace the CCRadio/ CCRadioPlus/ CCRadio-2 Whip Antenna

Follow the steps below to replace the radio whip antenna.

1. Extend the old antenna until the small screw is visible at its pivot point.
See Figure 1a.

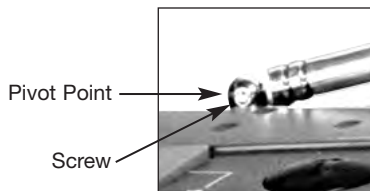


Figure 1a

2. Remove the screw on the old antenna.
See Figure 1b.



Figure 1b

3. Trade the new antenna for the old one and replace the screw at the same spot.

Note: Opening the radio case will void your warranty.

The only part of the antenna that you need to replace is the visible portion from the pivot point up.

If you have any questions or need technical assistance, please call our Tech Department at (707) 725-9000, Monday - Friday, between 9:00 a.m. and 5:30 p.m. PST.